

Communication Complexity of Combinatorial Auctions with Submodular Valuations

Shahar Dobzinski Jan Vondrák


Weizmann Institute of Science

IBM Almaden Research

ACM-SIAM SODA 2013, New Orleans


Welfare maximization in combinatorial auctions

Problem: m items are to be sold to n agents,
with monotone valuation functions $v_i : 2^M \rightarrow \mathbb{R}_+$

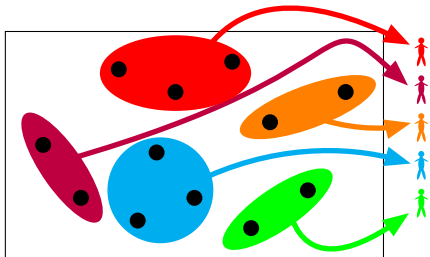

Welfare maximization in combinatorial auctions

Problem: m items are to be sold to n agents,
with monotone valuation functions $v_i : 2^M \rightarrow \mathbb{R}_+$

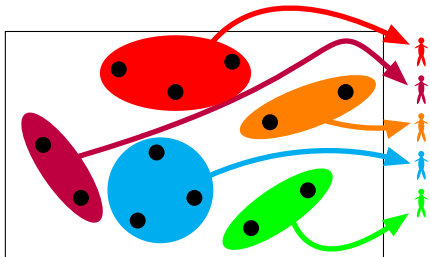


How do we allocate the items, so that

- 1 The total welfare obtained by the agents is close to optimal
- 2 The algorithm uses polynomial computation/communication

Welfare maximization in combinatorial auctions

Problem: m items are to be sold to n agents,
with monotone valuation functions $v_i : 2^M \rightarrow \mathbb{R}_+$

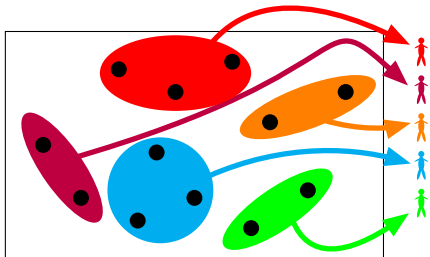


How do we allocate the items, so that

- 1 The total welfare obtained by the agents is close to optimal
 - 2 The algorithm uses polynomial computation/communication
 - 3 Agents are motivated to reveal their true preferences
- NOT IN THIS PAPER

Submodular functions

Submodularity = property of *diminishing returns*.

Let the *marginal value* of element j be $f_S(j) = f(S + j) - f(S)$.

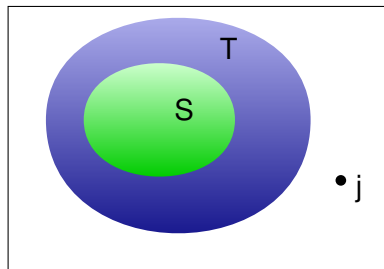


Definition: f is submodular, if j cannot add more value to T than S .

$$f_S(j) \geq f_T(j)$$

Fractionally subadditive (XOS) functions

Fact

Submodular Functions $\subset$ Fractionally Subadditive = XOS Functions

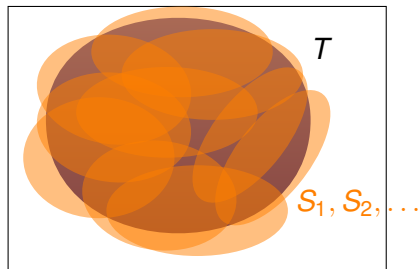

Definition: f is fractionally subadditive,

$$\text{if } f(T) \leq \sum \alpha_i f(S_i) \\ \text{whenever } \mathbf{1}_T \leq \sum \alpha_i \mathbf{1}_{S_i}.$$

Definition: f is an XOS function,

if f is a maximum over linear functions: $f(S) = \max_i \sum_{j \in S} c_{ij}$

Input access issue:

each valuation carries an exponential amount of information!

Input access issue:

each valuation carries an exponential amount of information!

- ➊ Resort to a class of valuations with *compact representation*

Input access issue:

each valuation carries an exponential amount of information!

- ① Resort to a class of valuations with *compact representation*
- ② Use an *oracle model*: algorithm can ask certain types of queries
 - *value query*: What is your value for set S ?
 - *demand query*: Which set would you buy under prices $p_1, \dots, p_m$?

Input access issue:

each valuation carries an exponential amount of information!

- ❶ Resort to a class of valuations with *compact representation*
- ❷ Use an *oracle model*: algorithm can ask certain types of queries
 - *value query*: What is your value for set S ?
 - *demand query*: Which set would you buy under prices $p_1, \dots, p_m$?

What an algorithm can achieve may depend on the oracle model:

- For XOS valuations with demand queries, there is a $(1 - 1/e)$ -approximation [Feige '06]
- For XOS valuations with value queries, there is no approximation better than $\sqrt{m}$ [Mirrokni-Schapira-V. '08]

The main question in this paper

What are the limits on approximation in combinatorial auctions,
regardless of the oracle model?

(for oracle models where queries are asked separately about each valuation)

The main question in this paper

What are the limits on approximation in combinatorial auctions, regardless of the oracle model?

(for oracle models where queries are asked separately about each valuation)

Two approaches:

- *Communication complexity*: What is the amount of information the agents have to communicate with the algorithm (or each other) to achieve a good outcome? [Nisan-Segal '01]
- *NP-hardness for simple valuations*: What can we achieve if each valuation has nonzero value only for constantly many items? [Feige '06]

Both lower bounds imply hardness for any "reasonable" oracle model as above.

Welfare maximization in CA: state of the art

Valuations	Submodular	XOS
Approximation with value queries	$1 - 1/e$ [V '08]	$m^{-1/2}$ [DNS '05]
Hardness with value queries	$1 - 1/e + \epsilon$ [KLMM '05]	$m^{-1/2+\epsilon}$ [MSV '08]
Approximation with demand queries	$1 - 1/e + 10^{-5}$ [FV '06]	$1 - 1/e$ [F '06]
Communication hardness	$1 - 1/m$ [DS '06]	$1 - 1/e + \epsilon$ [DS '06]
NP-hardness for simple valuations	$1 - \epsilon$ [FV '06]	$1 - 1/e + \epsilon$ [FV '06]

Open question: [Nisan-Segal '01]

Is it possible to achieve a PTAS for submodular valuations with polynomial communication?

Welfare maximization in CA: state of the art

Valuations	Submodular	XOS
Approximation with value queries	$1 - 1/e$ [V '08]	$m^{-1/2}$ [DNS '05]
Hardness with value queries	$1 - 1/e + \epsilon$ [KLMM '05]	$m^{-1/2+\epsilon}$ [MSV '08]
Approximation with demand queries	$1 - 1/e + 10^{-5}$ [FV '06]	$1 - 1/e$ [F '06]
Communication hardness	$1 - 1/(2e) + \epsilon$	$1 - 1/e + \epsilon$ [DS '06]
NP-hardness for simple valuations	$1 - 1/(2e) + \epsilon$	$1 - 1/e + \epsilon$ [FV '06]

New result: [Dobzinski, V.]

Any $(1 - \frac{1}{2e} + \epsilon)$ -approximation submodular valuations would


(a) require exponential communication,

(b) imply $P = NP$, even for simple submodular valuations.

How do we prove this?

Recall the analysis of communication complexity for XOS valuations
[Nisan '02], [Dobzinski-Schapira '06]:

Multiparty Set Disjointness [Alon-Matias-Szegedy '96]

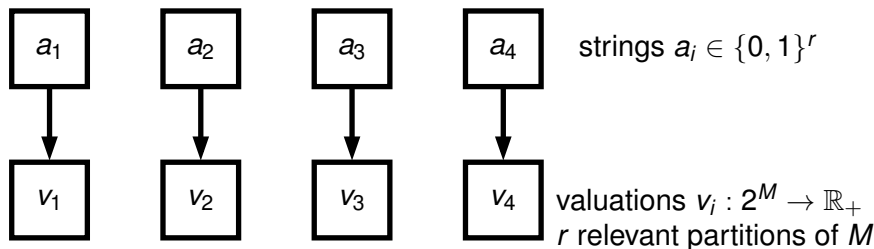

Combinatorial Auction

- YES case: all strings share a bit = 1
 $\Rightarrow$ there is a partition where all players get a Good Set
- NO case: no two strings share a bit = 1
 $\Rightarrow$ in every partition, most players get a Bad Set

New construction of submodular functions

Crucial step: How to define a function which is "high" on Good Sets and "low" on Bad Sets? Easy with XOS: $v(S) = \max_{F \in \mathcal{F}} |S \cap F|$.


New construction of submodular functions

Crucial step: How to define a function which is "high" on Good Sets and "low" on Bad Sets? Easy with XOS: $v(S) = \max_{F \in \mathcal{F}} |S \cap F|$.

How do we do it with submodular functions?

Idea: Think of the continuous version of submodularity,


$$F : [0, 1]^m \rightarrow \mathbb{R}, \quad \frac{\partial^2 F}{\partial x_i \partial x_j} \leq 0.$$

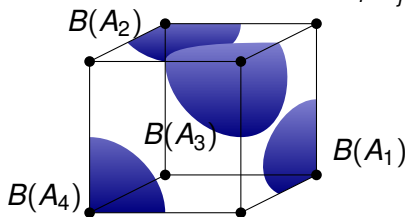

- Start with a basic function $F(x)$.
- Modify this function in *disjoint* regions $B(A)$ around Good Sets A , so that $F(\mathbf{1}_A)$ gets increased for each Good Set A .

Construction more specifically

- Partitions are chosen so that for any two Good Sets, $|A \cap A'| \leq b$.
- Call $x \in [0, 1]^M$ "close to A ", if $x(A) - x(\bar{A}) > b$.
- *Lemma*: x can be close to at most one Good Set A .

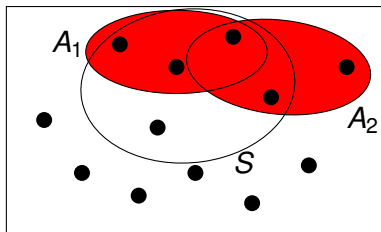


Example: $b = 1$, $x = \mathbf{1}_S$

So we can define $B(A)$ as the region of all points close to A
 $\Rightarrow B(A)$ are *disjoint* for different Good Sets A .


Finishing the construction

Define disjoint regions $B(A)$ for Good Sets A :

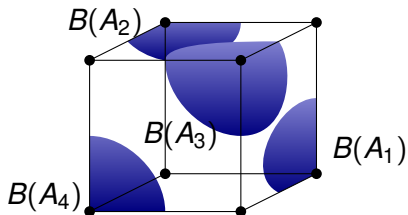

Finishing the construction


Define disjoint regions $B(A)$ for Good Sets A :

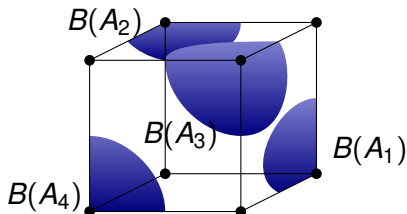

- Start with a basic function $F(x) = 1 - (1 - a \sum_{i=1}^m x_i)^2$.
- For each Good Set A , define a modified function $F_A(x) = 1 - (1 - a(2 \sum_{i \in A} x_i - b))_+ (1 - a(2 \sum_{i \notin A} x_i + b))_+.$
- F_A connects seamlessly to F at the boundary of B_A .

Finishing the construction

Define disjoint regions $B(A)$ for Good Sets A :

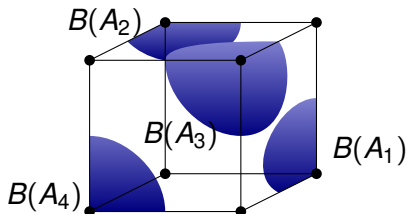

- Start with a basic function $F(x) = 1 - (1 - a \sum_{i=1}^m x_i)^2$.
- For each Good Set A , define a modified function $F_A(x) = 1 - (1 - a(2 \sum_{i \in A} x_i - b))_+ (1 - a(2 \sum_{i \notin A} x_i + b))_+.$
- F_A connects seamlessly to F at the boundary of B_A .

Careful tuning of parameters:

The gap between YES/NO instances is $1 - 1/(2e) + \epsilon$.

Conclusions

- We give the first communication complexity result ruling out a PTAS for submodular combinatorial auctions, in any oracle model.
- For the demand oracle model, we narrow the gap to

$$[1 - 1/e + 10^{-5}, 1 - 1/(2e)].$$

- We prove similar results for CPP and Max-Min Allocation.

Conclusions

- We give the first communication complexity result ruling out a PTAS for submodular combinatorial auctions, in any oracle model.
- For the demand oracle model, we narrow the gap to

$$[1 - 1/e + 10^{-5}, 1 - 1/(2e)].$$

- We prove similar results for CPP and Max-Min Allocation.

Open questions:

- What is the optimal approximation for submodular combinatorial auctions:
 - 1 In the demand oracle model?
 - 2 Bounded only by communication complexity?
- Can we prove stronger communication complexity results for *truthful mechanisms* for combinatorial auctions?